



**APPLICATIONS:**  
SIGHT GLASS TUBING  
LIGHTING DISPLAYS  
CORE SAMPLING  
PNEUMATIC TUBE SYSTEMS  
PROTECTANT SLEEVES  
LED TUBING  
HIGH TEMPERATURE LINES

# Polycarbonate Tubing Clear, Strong, Impact Resistant

- Clear as glass
- High tensile strength over wide temperature range
- High impact strength — even at low temperatures
- UV Stabilized
- Excellent high-temperature resistance
- Flame-resistant
- Self-extinguishing
- Can be machined, drilled, cut, and sawed
- Easily joined with solvents or adhesives

For the clarity of glass and the impact resistance of metal, specify Excelon® PC tubing. Excelon® PC provides extraordinary design and fabrication opportunities.

Excelon® PC can be ordered from stock in .375" to 6" OD, in 8' lengths. Custom orders are also available in sizes up to 10" OD and in a variety of wall thicknesses and lengths. Specific formulations are available for tints and colors with performance additives for radiation resistance and FDA applications.

## PHYSICAL PROPERTIES

PHYSICAL	NOMINAL VALUE (ENGLISH)	NOMINAL VALUE (SI)	TEST METHOD
<b>Density / Specific Gravity</b>			
Natural	1.20	1.20 g/cm <sup>3</sup>	ASTM D792
Natural	1.20 g/cm <sup>3</sup>	1.20 g/cm <sup>3</sup>	ISO 1183
<b>Melt Mass-Flow Rate (MFR) (300°C/1.2 kg)</b>	12 g/10 min	12 g/10 min	ASTM D1238 / ISO 1133
<b>Molding Shrinkage</b>			
Flow : 0.126 in (3.20 mm)	5.0E-3 to 7.0E-3 in/in	0.50 to 0.70 %	ASTM D955
Across Flow : 0.126 in (3.20 mm)	5.0E-3 to 7.0E-3 in/in	0.50 to 0.70 %	ASTM D955
Across Flow : 0.0787 in (2.00 mm)	0.50 to 0.70 %	0.50 to 0.70 %	ISO 294-4
Flow : 0.0787 in (2.00 mm)	0.50 to 0.70 %	0.50 to 0.70 %	ISO 294-4

MECHANICAL	NOMINAL VALUE (ENGLISH)	NOMINAL VALUE (SI)	TEST METHOD
<b>Tensile Modulus</b>			
- <sup>4</sup>	290000 psi	2000 MPa	ASTM D638
-	261000 psi	1800 MPa	ISO 527-1/50
<b>Tensile Strength</b>			
Yield <sup>4</sup>	9140 psi	63.0 MPa	ASTM D638
Yield	9280 psi	64.0 MPa	ISO 527-2/50
Break <sup>4</sup>	9280 psi	64.0 MPa	ASTM D638
Break	9430 psi	65.0 MPa	ISO 527-2/50
<b>Tensile Elongation</b>			
Break <sup>4</sup>	110 %	110 %	ASTM D638
Break	6.0 %	6.0 %	ISO 527-2/50
<b>Flexural Modulus</b>			
- <sup>5</sup>	334000 psi	2300 MPa	ASTM D790
- <sup>6</sup>	334000 psi	2300 MPa	ISO 178
<b>Flexural Strength</b>			
- <sup>5</sup>	13100 psi	90.0 MPa	ASTM D790
- <sup>6</sup>	13200 psi	91.0 MPa	ISO 178

IMPACT	NOMINAL VALUE (ENGLISH)	NOMINAL VALUE (SI)	TEST METHOD
<b>Charpy Notched Impact Strength <sup>7</sup> (73°F (23°C))</b>	38 ft·lb/in <sup>2</sup>	80 kJ/m <sup>2</sup>	ISO 179/1eA
<b>Notched Izod Impact</b>			
73°F (23°C), 0.125 in (3.18 mm)	16 ft·lb/in	850 J/m	ASTM D256
73°F (23°C), 0.250 in (6.35 mm)	2.8 ft·lb/in	150 J/m	ASTM D256
73°F (23°C) <sup>7</sup>	40 ft·lb/in <sup>2</sup>	85 kJ/m <sup>2</sup>	ISO 180/1A

HARDNESS	NOMINAL VALUE (ENGLISH)	NOMINAL VALUE (SI)	TEST METHOD
Rockwell Hardness (R-Scale)	120	120	ASTM D785 / ISO 2039-2


Samples available upon request.

Can be ordered from stock .375" to 6" OD in 8' lengths. Custom sizes, lengths, and colors available upon request.

Available in FDA formulations.

**REGULATORY COMPLIANCE:** REACH and RoHS compliant

Does not meet California Prop 65 compliance.

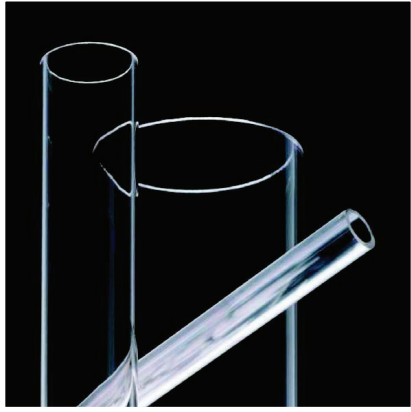

**APPLICATIONS:**  
SIGHT GLASS TUBING  
LIGHTING DISPLAYS  
CORE SAMPLING  
PNEUMATIC TUBE SYSTEMS  
PROTECTANT SLEEVES  
LED TUBING  
HIGH TEMPERATURE LINES

Samples available upon request.

Can be ordered from stock .375" to 6" OD in 8' lengths. Custom sizes, lengths, and colors available upon request.

Available in FDA formulations.

**REGULATORY COMPLIANCE:** REACH and RoHS compliant

Does not meet California Prop 65 compliance.

THERMAL	NOMINAL VALUE (ENGLISH)	NOMINAL VALUE (SI)	TEST METHOD
<b>Deflection Temperature Under Load</b>			
66 psi (0.45 MPa), Unannealed, 0.252 in (6.40 mm)	284 °F	140 °C	ASTM D648
66 psi (0.45 MPa), Unannealed, 0.157 in (4.00 mm)	275 °F	135 °C	ISO 75-2/B
264 psi (1.8 MPa), Unannealed, 0.252 in (6.40 mm)	275 °F	135 °C	ASTM D648
264 psi (1.8 MPa), Unannealed, 0.157 in (4.00 mm)	257 °F	125 °C	ISO 75-2/A
<b>Vicat Softening Temperature</b>	293 °F	145 °C	ISO 306/B50

FLAMMABILITY	NOMINAL VALUE (ENGLISH)	NOMINAL VALUE (SI)	TEST METHOD
0.03 to 0.12 in (0.8 to 3.0 mm)	V-2	V-2	UL 94

INJECTION	NOMINAL VALUE (ENGLISH)	NOMINAL VALUE (SI)
<b>Drying Temperature</b>		
Desiccant Dryer	230 °F	110 °C
Hot Air Dryer	248 °F	120 °C
<b>Drying Time</b>		
Desiccant Dryer	4.0 hr	4.0 hr
Hot Air Dryer	4.0 hr	4.0 hr
<b>Suggested Max Moisture</b>	0.050 %	0.050 %
<b>Rear Temperature</b>	500 to 518 °F	260 to 270 °C
<b>Middle Temperature</b>	518 to 536 °F	270 to 280 °C
<b>Front Temperature</b>	545 to 563 °F	285 to 295 °C
<b>Nozzle Temperature</b>	554 °F	290 °C
<b>Mold Temperature</b>	122 to 158 °F	50 to 70 °C
<b>Injection Pressure</b>	1140 psi	7.85 MPa
<b>Back Pressure</b>	569 to 853 psi	3.92 to 5.88 MPa
<b>Screw Speed</b>	60 to 80 rpm	60 to 80 rpm

*Values listed are typical and are meant only as a guide to aid in design. Field testing should be performed to find the actual values for your application.*



**APPLICATIONS:**  
SIGHT GLASS TUBING  
LIGHTING DISPLAYS CORE  
SAMPLING PNEUMATIC  
TUBE SYSTEMS  
PROTECTANT SLEEVES

**PC SIZING CHART**

ITEM NO.	ID	OD	WALL	FT / CTN
5704	.250	.375	.062	1480
5706	.375	.500	.062	800
5708	.500	.625	.062	560
5710	.625	.750	.062	400
5712	.750	.875	.062	288
5713	.750	1	.125	240
5714	.875	1	.062	240
5716	1	1.125	.062	200
57163	1	1.250	.125	160
5718	1.125	1.250	.062	160
5720	1.250	1.500	.125	184
5722	1.375	1.500	.062	240
5724	1.500	1.750	.125	160
5726	1.625	1.750	.062	192
5728	1.750	2	.125	160
5730	1.875	2	.062	160
5732	2	2.250	.125	112
5733	2.125	2.250	.062	112
5734	2.250	2.500	.125	96
5735	2.375	2.500	.062	96
5736	2.500	2.750	.125	72
5737	2.625	2.750	.062	72
5738	2.750	3	.125	64
5739	2.875	3	.062	64
5748	3	3.125	.062	56
57483	3	3.250	.125	48
57543	3.250	3.500	.125	48
57603	3.750	4	.125	40
57923	5.750	6	.125	16

Samples available upon request.

Can be ordered from stock .375" to 6" OD in 8' lengths. Custom sizes, lengths, and colors available upon request.

Available in FDA formulations.

**REGULATORY COMPLIANCE:** REACH and RoHS compliant

Does not meet California Prop 65 compliance.



21649 Cedar Creek Ave  
Georgetown, DE 19947  
P: 302-855-0139  
E: [tpisales@excelon.com](mailto:tpisales@excelon.com)  
[www.thermoplasticprocesses.com](http://www.thermoplasticprocesses.com)

**LIABILITY CLAUSE**

TPI PARTNERS, INC., hereinafter called the "Manufacturer," warrants that its products shall be free from defects in workmanship and materials.

THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES EITHER EXPRESSED OR IMPLIED, INCLUDING WARRANTIES FOR FITNESS FOR PURPOSE INTENDED. The Manufacturer's liability is limited to the replacement of any materials which, after an examination by the Manufacturer and its sole option, are found to be defective. The Manufacturer will honor only those claims which are presented within ninety (90) days of the delivery of the materials to the purchaser. THE MANUFACTURER SPECIFICALLY DISCLAIMS ANY AND ALL LIABILITY FOR CONSEQUENTIAL DAMAGES. This literature supersedes all previous literature and the responsibilities made thereon.